


TOGE TSM BS VS

Bridge cap anchor for subsequent installation for road bridges

Stainless-Steel A4

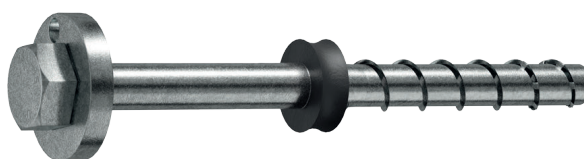

Item nr.	Designation	Depth of drill hole h_0	Embedment depth of anchor h_{nom}	Max. thickness of fixture t_{fix}	Packing Unit
741 162 301	TSM BS 16x230 SW27 VS	110 - 170 mm	100 - 160 mm	-	25
741 162 751	TSM BS 16x275 SW27 VS	110 - 170 mm	100 - 160 mm	-	25
741 222 901	TSM BS 22x290 SW17 VS M24	110 - 210 mm	100 - 200 mm	-	20
741 222 903	TSM BS 22x290 SW15 VS M20	110 - 210 mm	100 - 200 mm	-	20

Composite Mortar CF-T 300V

Chemical special mortar
Vinylester styrene-free, suitable for
concrete screws

Product overview

Item nr.	Designation	Packing Unit
222 222 003	Cartridge CF-T 300V	1
222 223 001	Mixing nozzle for CF-T 300V	1
222 222 004	Squeezing pistol for CF-T 300V	1



Processing Instructions

Temperature in ground	Processing time	Min. curing time in dry borehole	Min. curing time in wet borehole
$\geq -5^{\circ}\text{C}$	60 min	360 min	720 min
$\geq 0^{\circ}\text{C}$	60 min	180 min	360 min
$\geq 5^{\circ}\text{C}$	60 min	120 min	240 min
$\geq 10^{\circ}\text{C}$	45 min	80 min	160 min
$\geq 20^{\circ}\text{C}$	15 min	45 min	90 min
$\geq 30^{\circ}\text{C}$	5 min	25 min	50 min
$\geq 35^{\circ}\text{C}$	4 min	20 min	40 min