

TOGE TSM ECO

The economical concrete screw

Economical

The innovative and optimized production process enables price savings without compromising on quality. The TOGE TSM ECO is a high-quality product that is still easy on your budget.

Good load values for versatile applications

Whether tensile or shear loads - the TOGE TSM ECO offers outstanding load values that meet your requirements. You can rely on its robustness and stability to securely fasten and reliably hold shelving systems or other attachments.

Easy to install

Thanks to its intelligent design and optimized geometry, the TOGE TSM ECO can be screwed into concrete effortlessly. This saves valuable working time and effort.



ETA Approval

With ETA-23/0693, the TOGE TSM ECO concrete screw has a high-quality approval that officially confirms its performance and reliability. It therefore meets the highest quality and safety standards.

Sustainability in focus

By using optimized production processes, we not only reduce manufacturing costs, but also CO₂ emissions. Your decision to use the TOGE TSM ECO concrete screw therefore contributes to a sustainable future without compromising on quality.

Developed and manufactured in Germany

The TOGE TSM ECO concrete screw was developed by an experienced team in Germany and is also manufactured there. This guarantees not only the highest quality standards, but also close cooperation with experts who understand your needs as a user.

Approval


Approvals

European technical assessment ETA-23/0693, single fastening.

Base Materials

Approved for concrete strength classes from C20/25 to C50/60.

Cracked and non-cracked concrete.




Headshapes & Materials

Steel,
zinc plated

Steel, zinc
flake-coated

Steel, stainless
A4



Hexagon head and
pressed on-washer



Application Examples



Fastening of racks in high-bay warehouses



Fastening ventilation ducts



Fastening of railings



Fastening piping




Product Overview

Steel - zinc-plated

Version with hexagon head and pressed-on washer

Size	Washer-Ø
8	16,0 mm
10	20,0 mm

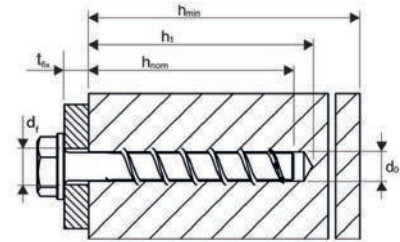

Item nr.	Designation	Depth of drill hole $h_{01} / h_{02} / h_{03}$	Embedment depth of anchor $h_{nom1} / h_{nom2} / h_{nom3}$	Max. thickness of fixture $t_{fix1} / t_{fix2} / t_{fix3}$	Packing Unit
600 008 060	TSM ECO 8x60 SW13	55mm / 65mm / -	45mm / 55mm / -	15mm / 5mm / -	50
600 008 070	TSM ECO 8x70 SW13	55mm / 65mm / 75mm	45mm / 55mm / 65mm	25mm / 15mm / 5mm	50
600 008 080	TSM ECO 8x80 SW13	55mm / 65mm / 75mm	45mm / 55mm / 65mm	35mm / 25mm / 15mm	50
600 008 100	TSM ECO 8x100 SW13	55mm / 65mm / 75mm	45mm / 55mm / 65mm	55mm / 45mm / 35mm	50
600 010 060	TSM ECO 10x60 SW 15	65mm / - / -	55mm / - / -	5mm / - / -	50
600 010 080	TSM ECO 10x80 SW15	65mm / 85mm / -	55mm / 75mm / -	25mm / 5mm / -	50
600 010 090	TSM ECO 10x90 SW15	65mm / 85mm / 95mm	55mm / 75mm / 85mm	35mm / 15mm / 5mm	50
600 010 100	TSM ECO 10x100 SW15	65mm / 85mm / 95mm	55mm / 75mm / 85mm	45mm / 25mm / 15mm	50
600 010 120	TSM ECO 10x120 SW15	65mm / 85mm / 95mm	55mm / 75mm / 85mm	65mm / 45mm / 35mm	50

Single fastening without fire exposure, Steel

Anchor size TSM E			TSM 8			TSM 10		
Nominal embedment depth	h _{nom}	[mm]	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
			45	55	65	55	75	85
Nominal diameter of drill bit	d ₀	[mm]	8			10		
Depth of drill hole	h ₀ min	[mm]	55	65	75	65	85	95
Effective anchorage depth	h _{ef}	[mm]	35	44	52	43	60	69
Diameter of clearance hole in the fixture	d _i max	[mm]	12			14		
Approved tension load in cracked concrete ^{1) 2)}	N _{zul}	[kN]	1,4	2,6	3,8	2,9	6,2	8,1
Approved shear load in cracked concrete ^{1) 2)}	V _{zul}	[kN]	7,1	7,7	9,7	11,6	19,1	19,4
Approved tension load in non-cracked concrete ^{1) 2)}	N _{zul}	[kN]	4,2	5,7	8,1	5,2	9,0	11,9
Approved shear load in non-cracked concrete ^{1) 2)}	V _{zul}	[kN]	7,7	7,7	9,7	12,9	19,4	19,4
Approved bending resistance	M _{zul}	[kN]	14,9			32,0		
Minimum edge distance	C _{min}	[mm]	35			40		
Minimum spacing	S _{min}	[mm]	35			40		
Minimum base material thickness	h _{min}	[mm]	80	100	120	100	130	
Maximum torque (with impact screw driver)		[Nm]	300			450		
ETA Seismic C1			No	No	No	No	No	No

¹⁾ For the determination of the approved loads, the partial safety factor from the approval $\gamma_M=1,5$ was taken into account for material resistance and a partial safety factor $\gamma_F=1,4$ for load actions.


²⁾ These values apply without influence of the spacing and edge distances.

Single fastening under fire exposure, Steel

Anchor size TSM E			TSM 8			TSM 10			
Nominal embedment depth	h _{nom}	[mm]	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	
			45	55	65	55	75	85	
Approved load under tensile and shear use ($F_{zul,fi} = N_{zul,fi} = V_{zul,fi}$)									
Fire resistance class									
R 30	Approved load	F _{zul,fi 30}	[kN]	0,8	1,4	2,0	1,5	3,3	4,3
R 60		F _{zul,fi 60}	[kN]	0,8	1,4	1,7	1,5	3,3	3,3
R 90		F _{zul,fi 90}	[kN]	0,8	1,1	1,1	1,5	2,3	2,3
R 120		F _{zul,fi 120}	[kN]	0,6	0,7	0,7	1,2	1,7	1,7
R 30		M _{zul,fi 30}	[Nm]	2,4			5,9		
R 60		M _{zul,fi 60}	[Nm]	1,8			4,5		
R 90		M _{zul,fi 90}	[Nm]	1,2			3,0		
R 120		M _{zul,fi 120}	[Nm]	0,9			2,3		
Edge distance									
R 30 bis R 120	C _{cr,fi}	[mm]	2 x h _{ef}						
The edge distance must be at least 300 mm if the fire load attacks from more than on side.									
Spacing									
R 30 bis R 120	S _{cr,fi}	[mm]	4 x h _{ef}						
Concrete pry-out failure									
R 30 bis R 120	k	[-]	2,1	2,8	2,5				
In wet concrete, the embedment depth must be increased by at least 30 mm.									


Installation Instructions

Installation instructions for concrete

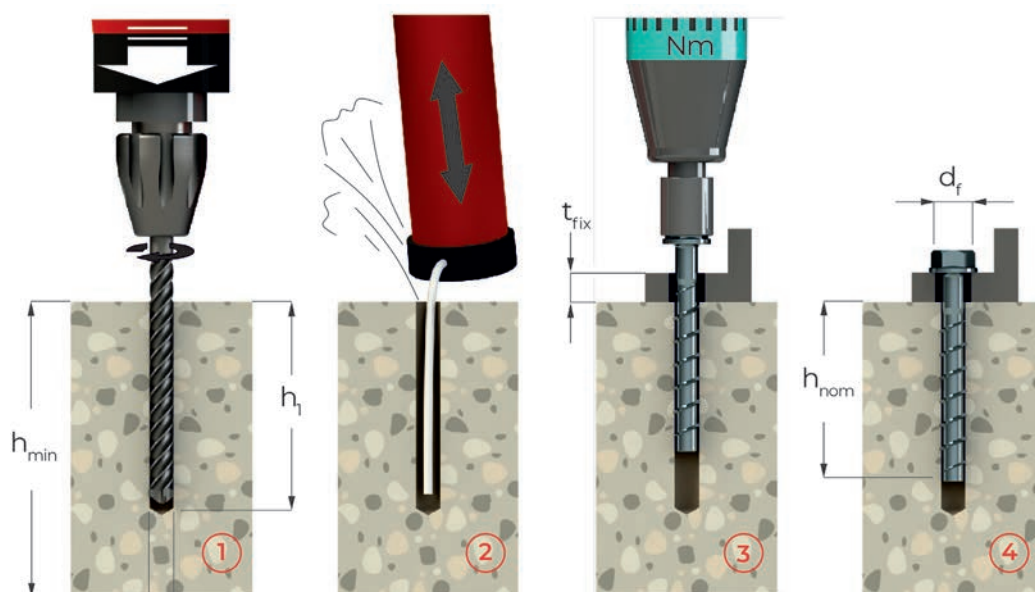

- 1) Create borehole.
- 2) Thoroughly clean borehole.
- 3) Screw in concrete screw.
- 4) The screw head must rest completely on the attachment.

Installation instructions with adjustment for sizes 8 to 10

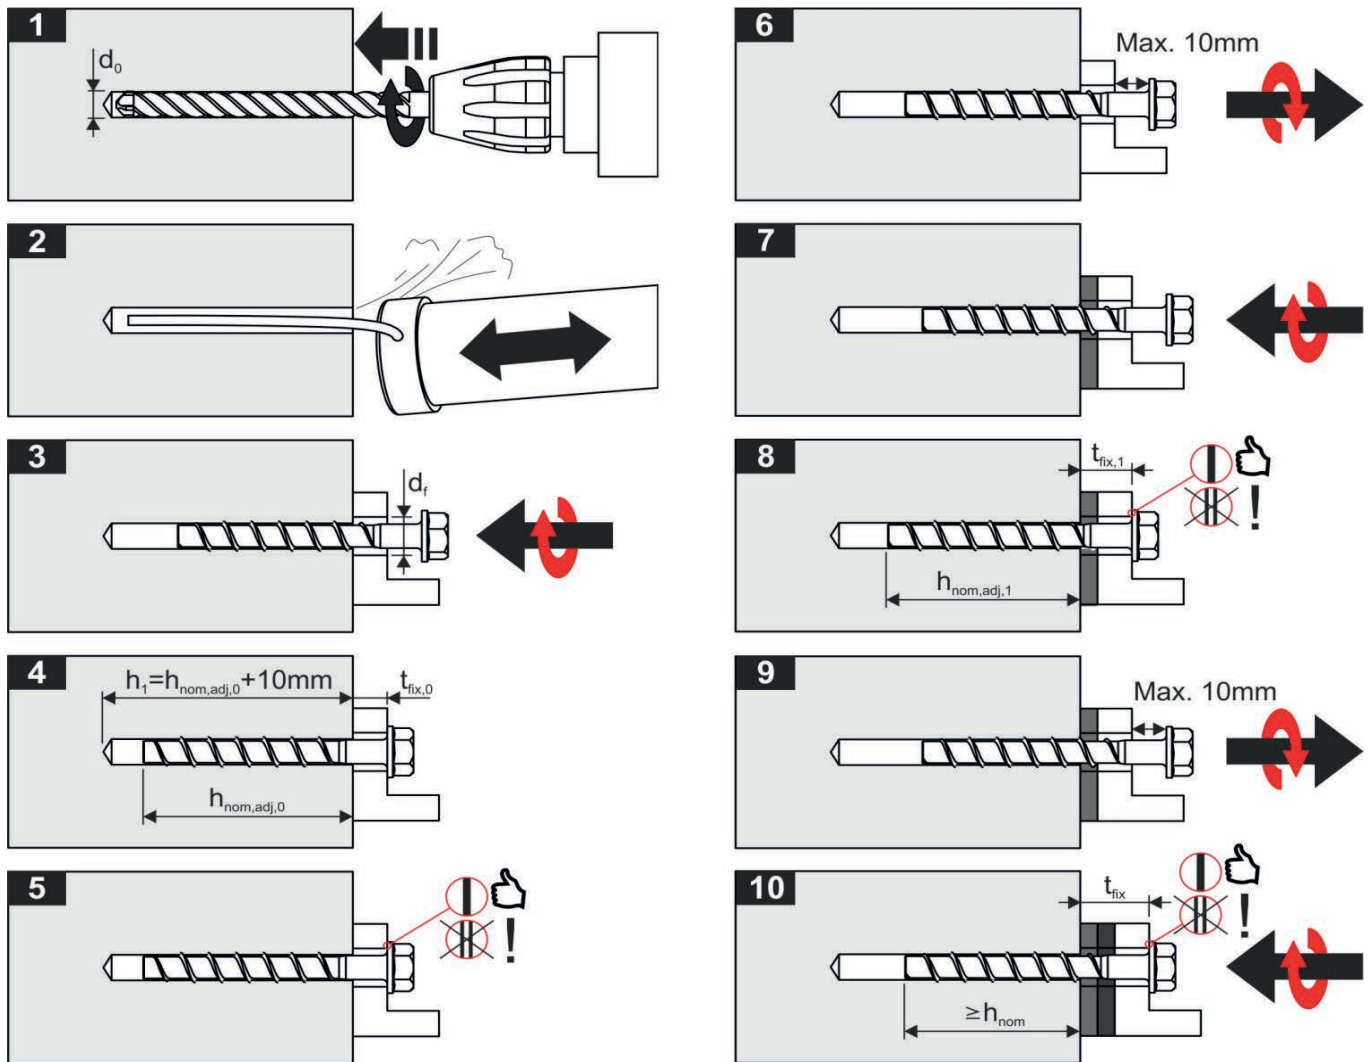

Important - please note during adjustment:

- The anchor may be adjusted maximum two times, while the anchor may turn back at most 10 mm.
- The total allowed thickness of shims added during the adjustment process is 10 mm.
- The final embedment depth after adjustment process must be equal or longer than h_{nom} .